


M-MODULE DEFAULT



Bestell-Nr. M-DEF
Order-Nr

M-DEF



Anschlußbelegung / Connection

Lemo-Stecker 0B, 9-pol.
Lemo-male 0B, 9-pol.

Pin-Nr. Pin-NO	Bezeichnung Designation	Litze-Nr. / Farbe Wire-NO / Colour
1	Power +	
2	Power +	
3	SYNC +	
4	SYNC -	
5	CAN GND	
6	Power GND	
7	Power GND	
8	CAN +	
9	CAN -	
Chassis	Shield	

Kurzanleitung


Gültig für Firmware mit Freigabedatum > 12/2006

1. Stecker M-DEF einstecken
2. Spannungsversorgung einschalten, LED leuchtet
3. 11 ... 12 s warten, dann Stecker abziehen, LED erlischt
4. Sobald LED wieder leuchtet, M-DEF erneut aufstecken
5. Sobald LED wieder erlischt, M-DEF erneut abziehen
6. Initialisierung wird durchgeführt, LED leuchtet nach ca. 5 s
7. Defaultinitialisierung abgeschlossen

How to use

Valid for firmware released later than 12/2006

1. Insert the default plug M-DEF
2. Switch on the power supply, LED lights
3. Wait for 11 ... 12 s and pull off M-DEF, LED goes out
4. As soon as the LED lights, insert M-DEF again
5. As soon as the LED goes out, pull off M-DEF again
6. Initialization is executed, LED lights after approx. 5 s
7. Default initialization finished

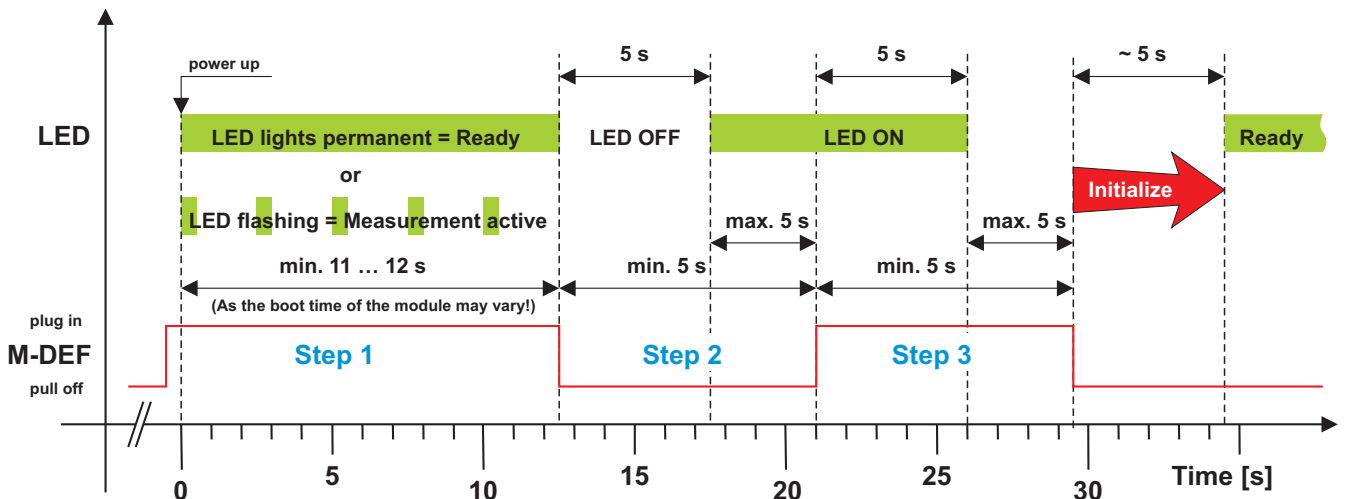

Alle Rechte vorbehalten. Nachdruck und Vervielfältigung, auch auszugsweise sind verboten!