


# SIM-SER-CAN-H/L Kabel OFFEN 0,5 mm<sup>2</sup> SIM-SER-CAN-H/L Cable OPEN 0,5 mm<sup>2</sup>



Bestell-Nr.  600-304.005 ( 0,5 m)     600-304.050 ( 5,0 m)  
Order-Nr.  600-304.015 ( 1,5 m)     600-304.100 (10,0 m)  
 600-304.030 ( 3,0 m)     600-304.

## 600-304.

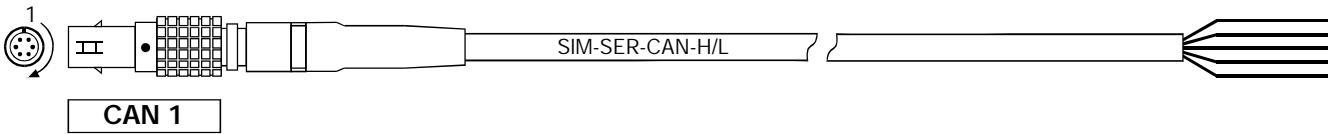


### Anschlußbelegung / Connection

Lemo-Stecker 1B, 6-pol. (schwarz)  
Lemo-male 1B, 6-pol. (black)


Pin-Nr. Pin-NO	Bezeichnung Designation	Litze-Nr. / Farbe Wire-NO / Colour
1	+ 24 V	1. black
2	120 Ω	2. black
3	CAN +	3. black
4	CAN -	4. black
5	CAN 1 GND	5. black
6		
Chassis	Shield	S (Shield, thick) blue

### Anschlußbeispiele / Connection examples

CAN-Anschluß High Speed  
CAN-connection High Speed

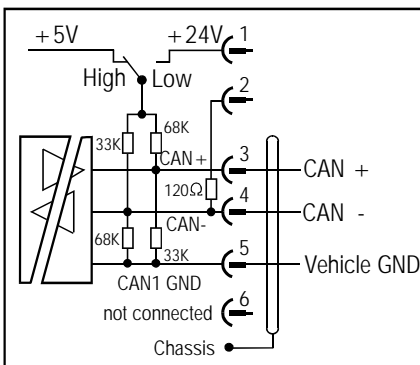

CAN-Anschluß High Speed mit Abschluß  
CAN-connection High Speed with termination

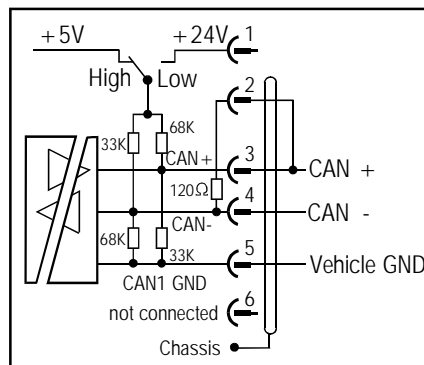

CAN-Anschluß Low Speed  
CAN-connection Low Speed

