


SIM-TH16 ROBUST Kabel offen

SIM-TH16 HEAVY Cable open



Bestell-Nr. 600-617.005 (0,5 m) 600-617.050 (5,0 m)
 Order-Nr. 600-617.015 (1,5 m) 600-617.100 (10,0 m)
 600-617.030 (3,0 m) 600-617.

600-617.

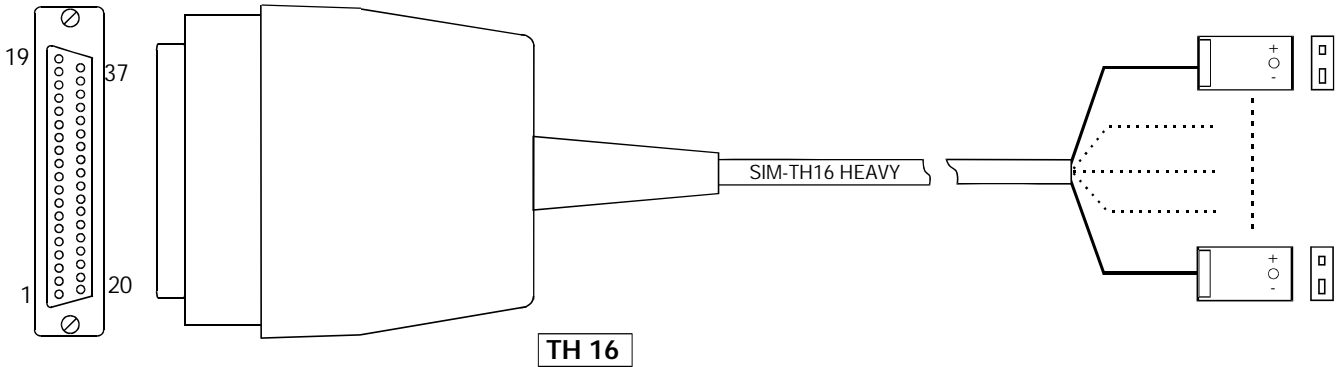

Anschlußbelegung / Connection

SUB D-Stift, 37-pol.
 SUB D-male, 37-pol.

SUB-MIN-Kupplung, 2-pol. (grün)
 SUB-MIN-coupling, 2-pol. (green)

Pin-Nr. Pin-Nr.	Bezeichnung Designation	Litze-Nr. / Farbe Wire-Nr. / Colour
1		
2		
3		
4	+ (NiCr)	+ Kanal 8
5	- (Ni)	-
6	+ (NiCr)	+ Kanal 8
7	- (Ni)	-
8	+ (NiCr)	+ Kanal 8
9	- (Ni)	-
10	+ (NiCr)	+ Kanal 8
11	- (Ni)	-
12	+ (NiCr)	+ Kanal 8
13	- (Ni)	-
14	+ (NiCr)	+ Kanal 8
15	- (Ni)	-
16	+ (NiCr)	+ Kanal 8
17	- (Ni)	-
18	+ (NiCr)	+ Kanal 1
19	- (Ni)	- Kanal 1
20		
21		
22	+ (NiCr)	+ Kanal 16
23	- (Ni)	-
24	+ (NiCr)	+ Kanal 16
25	- (Ni)	-
26	+ (NiCr)	+ Kanal 16
27	- (Ni)	-
28	+ (NiCr)	+ Kanal 16
29	- (Ni)	-
30	+ (NiCr)	+ Kanal 16
31	- (Ni)	-
32	+ (NiCr)	+ Kanal 16
33	- (Ni)	-
34	+ (NiCr)	+ Kanal 16
35	- (Ni)	-
36	+ (NiCr)	+ Kanal 9
37	- (Ni)	- Kanal 9

.Chassis

Alle Rechte vorbehalten. Nachdruck und Vervielfältigung, auch auszugsweise sind verboten!

600-617.cdr 16.04.02 Fr