


DIS-ECU Kabel K-LINE, CAN H DIS-ECU Cable K-LINE, CAN H



Bestell-Nr. 600-694.005 (0,5 m) 600-694.050 (5,0 m)
 Order-Nr. 600-694.015 (1,5 m) 600-694.100 (10,0 m)
 600-694.030 (3,0 m) 600-694.

600-694.

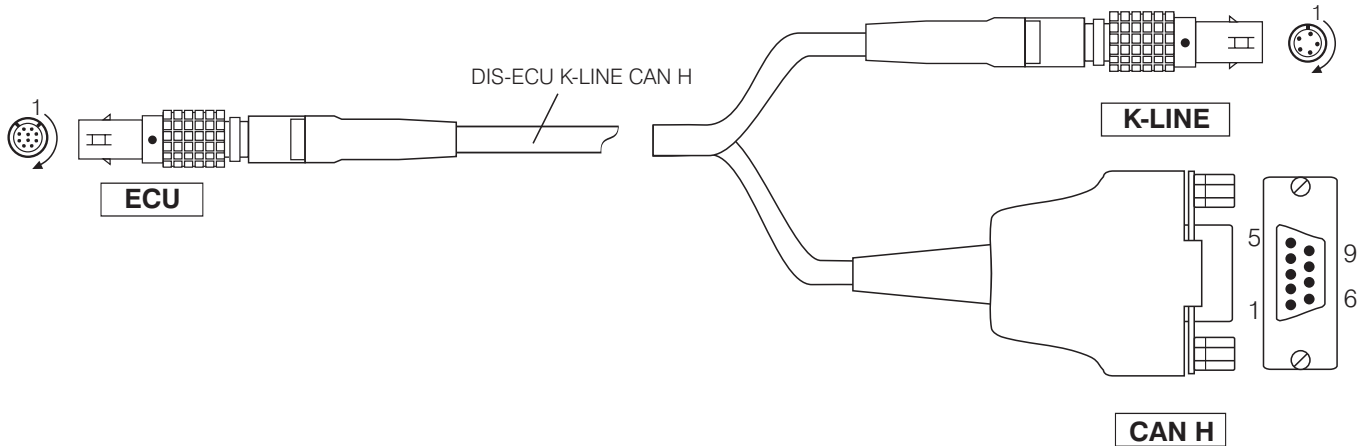

Anschlußbelegung / Connection

Lemo-Stecker 1B, 10-pol. (grau) Lemo-Stecker 1B, 5-pol. (schwarz) SUB D-Stift, 9-pol.
 Lemo-male 1B, 10-pol. (gray) Lemo-male 1B, 5-pol. (black) SUB-D-male, 9-pol.

ECU		K-LINE		CAN H	
Pin-Nr. Pin-No	Bezeichnung Designation			Litze-Nr. / Farbe Wire-No / Colour	
1	C-TERM				
2	C-CAN H			7	
3	C-CAN L			2	
4	C/K-GND	4		3	
5	C-BATT				
6	K-BATT	3			
7	L-LINE	2			
8	K-LINE	1			
9	POWER GND				
10	+ POWER GSM				
Chassis	Shield	Chassis		Chassis	

600-694.cdr 24.08.10 WL

Alle Rechte vorbehalten. Nachdruck und Vervielfältigung, auch auszugsweise sind verboten!
 All rights reserved. Reproduction or duplication in part or in whole are forbidden.